

DESCRIPTION


The Z-FV200PS-AS Switching DC Power Supply Panel supplies 24 V DC power to each component of Z-FV200 Series Voice Evacuation System. In addition, the DC power supply shall connect to an emergency power supply for uninterrupted DC power during AC power failure.

SPECIFICATIONS


Power Source	220~230 V AC, 50/60 Hz 24 V DC (19.5 - 27 V), M3 screw terminal
Power Consumption	160 W (275 VA) at rated power output (230 V AC operation)
Output	AC Operation : 24 V DC $\pm$ 1.5 A (total) DC Operation : Voltage lowering DC input voltage approx. by 2 V M4 screw terminal
Display	AC Power Indicator (Green), DC Power Indicator (Orange)
Operating Temperature	0 °C to +40 °C (14 °F to 104 °F)
Operating Humidity	Under 90% RH (no condensation)
Finish	Panel Aluminum, Black, Alumite
Dimensions	482 (W) X 44 (H) X 335 (D) mm (18.98" x 1.73" x 13.19)
Weight	3.2 kg (7.05 lb)
Accessory	Power Cable YA-301 ...1

APPEARANCE


Rear View

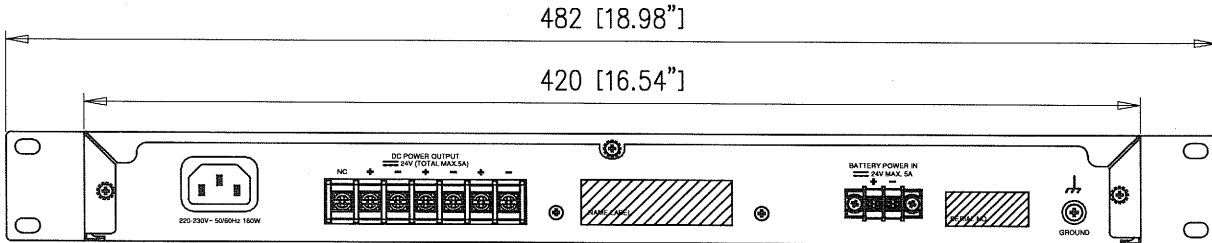

Front View

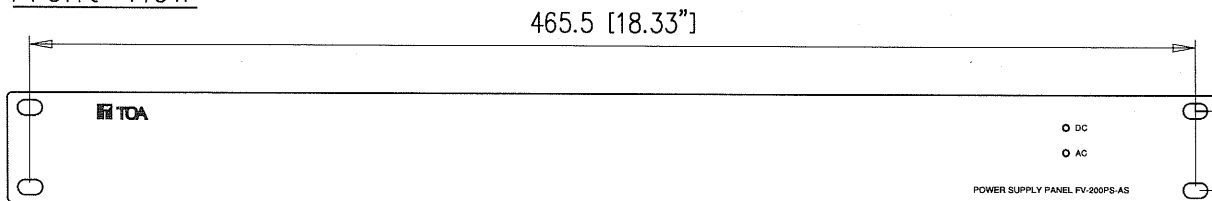

Side View

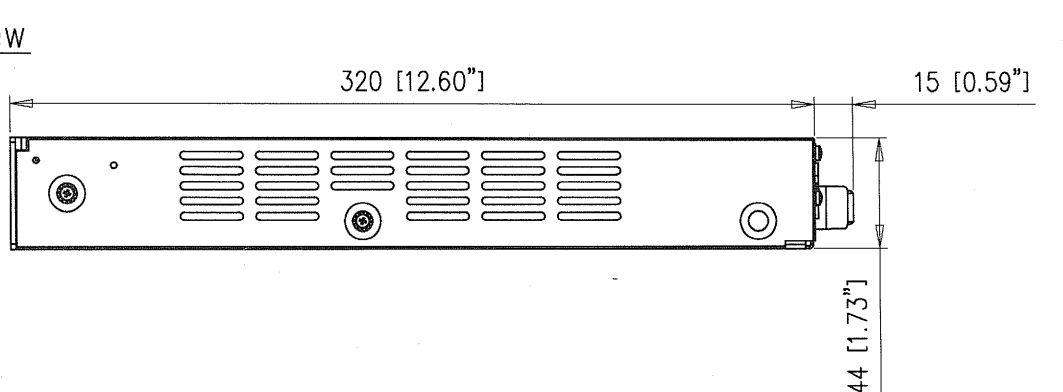

UNIT: mm SCALE: 1/3