

■DESCRIPTION

The FV-224PA features 240W rated output with high capacity for audio requirement.

■SPECIFICATIONS

* 0 dB = 1 V


Power Source	AC : 220 - 230 V AC, 50/60 Hz DC : 24 V DC (operating range : 19.5 - 27 V) M4 screw terminal, distance between barriers : 12 mm
Power Consumption	AC at rated output : 565 W (condition : AC230V) AC at no signal : 22 W IEC60065 : 245 W
Current Consumption	DC at rated output : 15 A (condition : DC27V) DC at no signal : 0.5 A IEC60065 : 5.8 A
Rated Output	240 W
Input	2 inputs, 0 dB*, 20 kΩ, balanced, removable terminal plug (3 pins) Input module VP-200VX (Option)
Output Impedance	21 Ω (70 V), 42 Ω (100 V)
Speaker Output	M4 screw terminal, distance between barriers : 12 mm
Control Output	Fault output Make : Normal, Break : Error or Power Off
S/N Ratio	Over 60 dB
Total Harmonic Distortion	Under 1% (1 kHz, 1/3 rated output)
Frequency Response	80 Hz - 15 kHz, ±3 dB, 1 kHz
Ventilation	Fan cooling
Led Indicator	Power (Green), Signal (Green), Peak (Red), Fault (Red) (Light : Overheat)
Operating Temperature	0°C to +40°C
Operating Humidity	Under 90% RH (no condensation)
Finish	Panel : Aluminum, black, alumite
Dimensions	482 (W) x 88.4 (H) x 337.2 (D) mm
Weight	13.3 kg
Accessory	Removable terminal plug (3pins) ...3, Instruction manual ...1
Option	VP-200VX input module

Notes:


- o The design and specifications are subject to change without notice for improvement.

■ APPEARANCE

Rear View

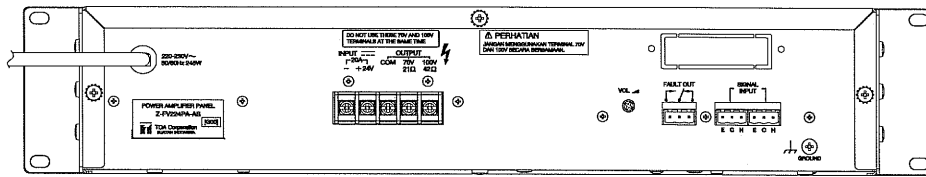

Front View

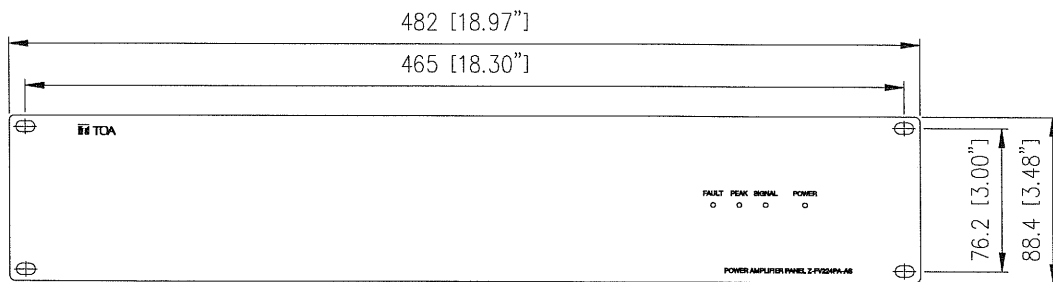

Right View

