

## DESCRIPTION

The Z-FV208EV-AS Emergency Message Panel operates within the section of the Z-FV200 Series Emergency Public address system. This panel is not required if the system is to be used solely for general-purpose public address application. It is possible to start and reset emergency broadcast through automatic or manual operation. The Z-FV208EV-AS come with 8 pre-recorded emergency message which is alert, evacuation, false, clear, message 1, message 2, message 3, message 4.


## SPECIFICATIONS

\* 0 dB = 1 V


|                        |                                                                                                                                                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Source           | 24 V DC (operating range : 19.5 ~ 27 V)<br>M3 Screw terminal<br>Usable power supply unit : Z-FV200PS-AS                                                              |
| Current Consumption    | 200 mA (rated)<br>100 mA (standby)                                                                                                                                   |
| Message Announcement   | 8 Messages :<br>Alert, Evacuation, False, Clear, Message 1, Message 2, Message 3, Message 4<br>Repeated continuously                                                 |
| Audio Input            | Fireman's microphone (accessory) :<br>-55 dB* 2.2 kΩ, unbalanced, XLR connector<br>SD/MMC card slot (up to 32 GB, Type file : MP3 File)                              |
| Audio Output           | EV Output : -20 dB*, unbalanced, Removable terminal block                                                                                                            |
| Control Input          | FA Input, Stop, 8 Messages contact input :<br>No-voltage make contact input, open voltage : 24 V DC,<br>Short circuit current : Under 5 mA, Removable terminal block |
| Control Output         | EV Output :<br>Contact switch (normally open), Removable terminal block<br>8 Control outputs :<br>Relay contact output, rated voltage : 24 V DC                      |
| Frequency Response     | 20 - 20,000 Hz, ±3 dB                                                                                                                                                |
| Distortion             | Under 1 % (1 kHz, Rated output)                                                                                                                                      |
| Indicator              | Power, Fire, Alert, Evacuation, False, Clear, Message 1, Message 2, Message 3, Message 4                                                                             |
| Format File            | MP3 File (Bit rate 320 kbps)                                                                                                                                         |
| Recording System       | USB data transfer                                                                                                                                                    |
| Maximum Recording Time | 25 minutes                                                                                                                                                           |
| Operating Temperature  | 0 °C to +40 °C                                                                                                                                                       |
| Operating Humidity     | Under 90% RH (no condensation)                                                                                                                                       |
| Finish                 | Front Panel : Aluminum, Black, Anodize<br>Case : Steel Plate, Black, Painting                                                                                        |
| Dimensions             | 482 (W) x 100 (H) x 281 (D) mm (18.97" x 3.93" x 11.06")                                                                                                             |
| Weight                 | 2.3 kg (5.07 lbs) (with microphone)                                                                                                                                  |
| Accessories            | Removable terminal plug (2 pins) ...4<br>Removable terminal plug (8 pins) ...4, Fireman's microphone ...1,                                                           |

## ■ APPEARANCE

### Front View

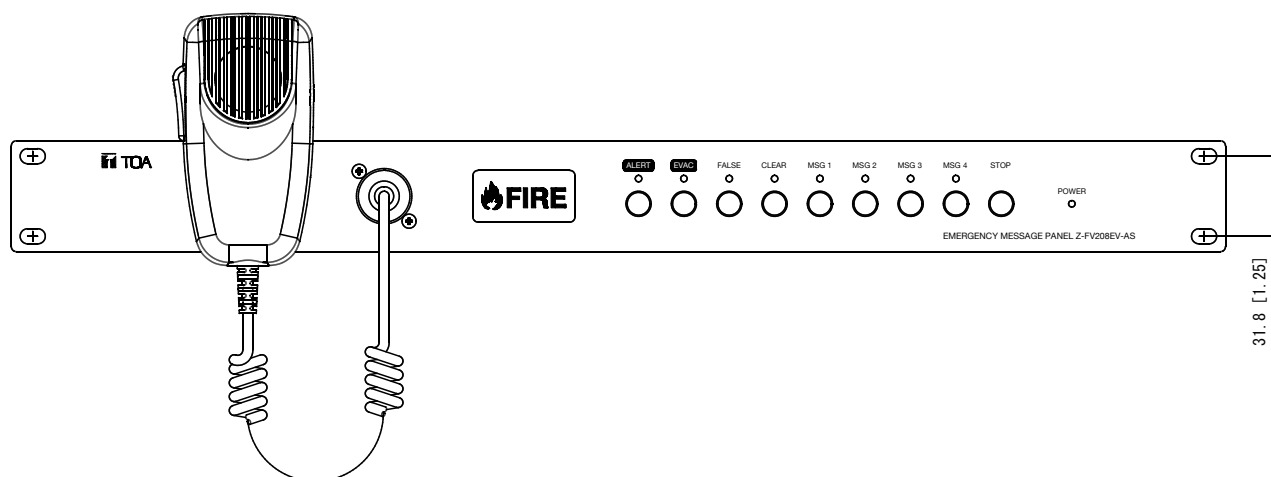

### Rear View

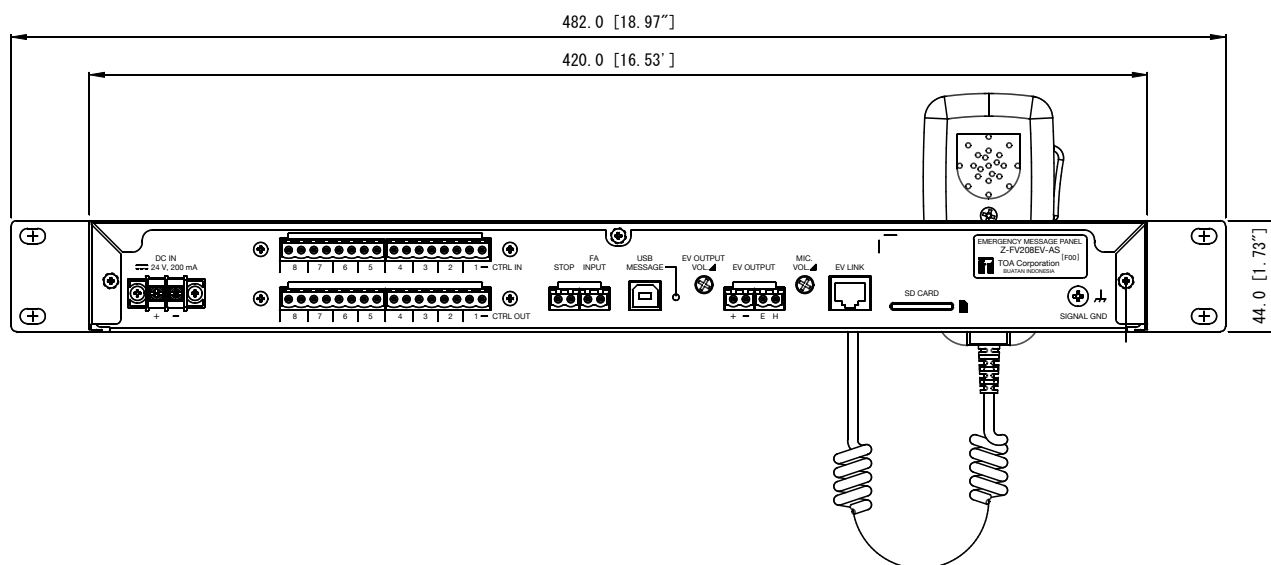

### Side View

