




# Z-DH502-AS

## Straight Horn

**Loud, Clear and Protected**  
Delivers powerful sound with long-range clarity.

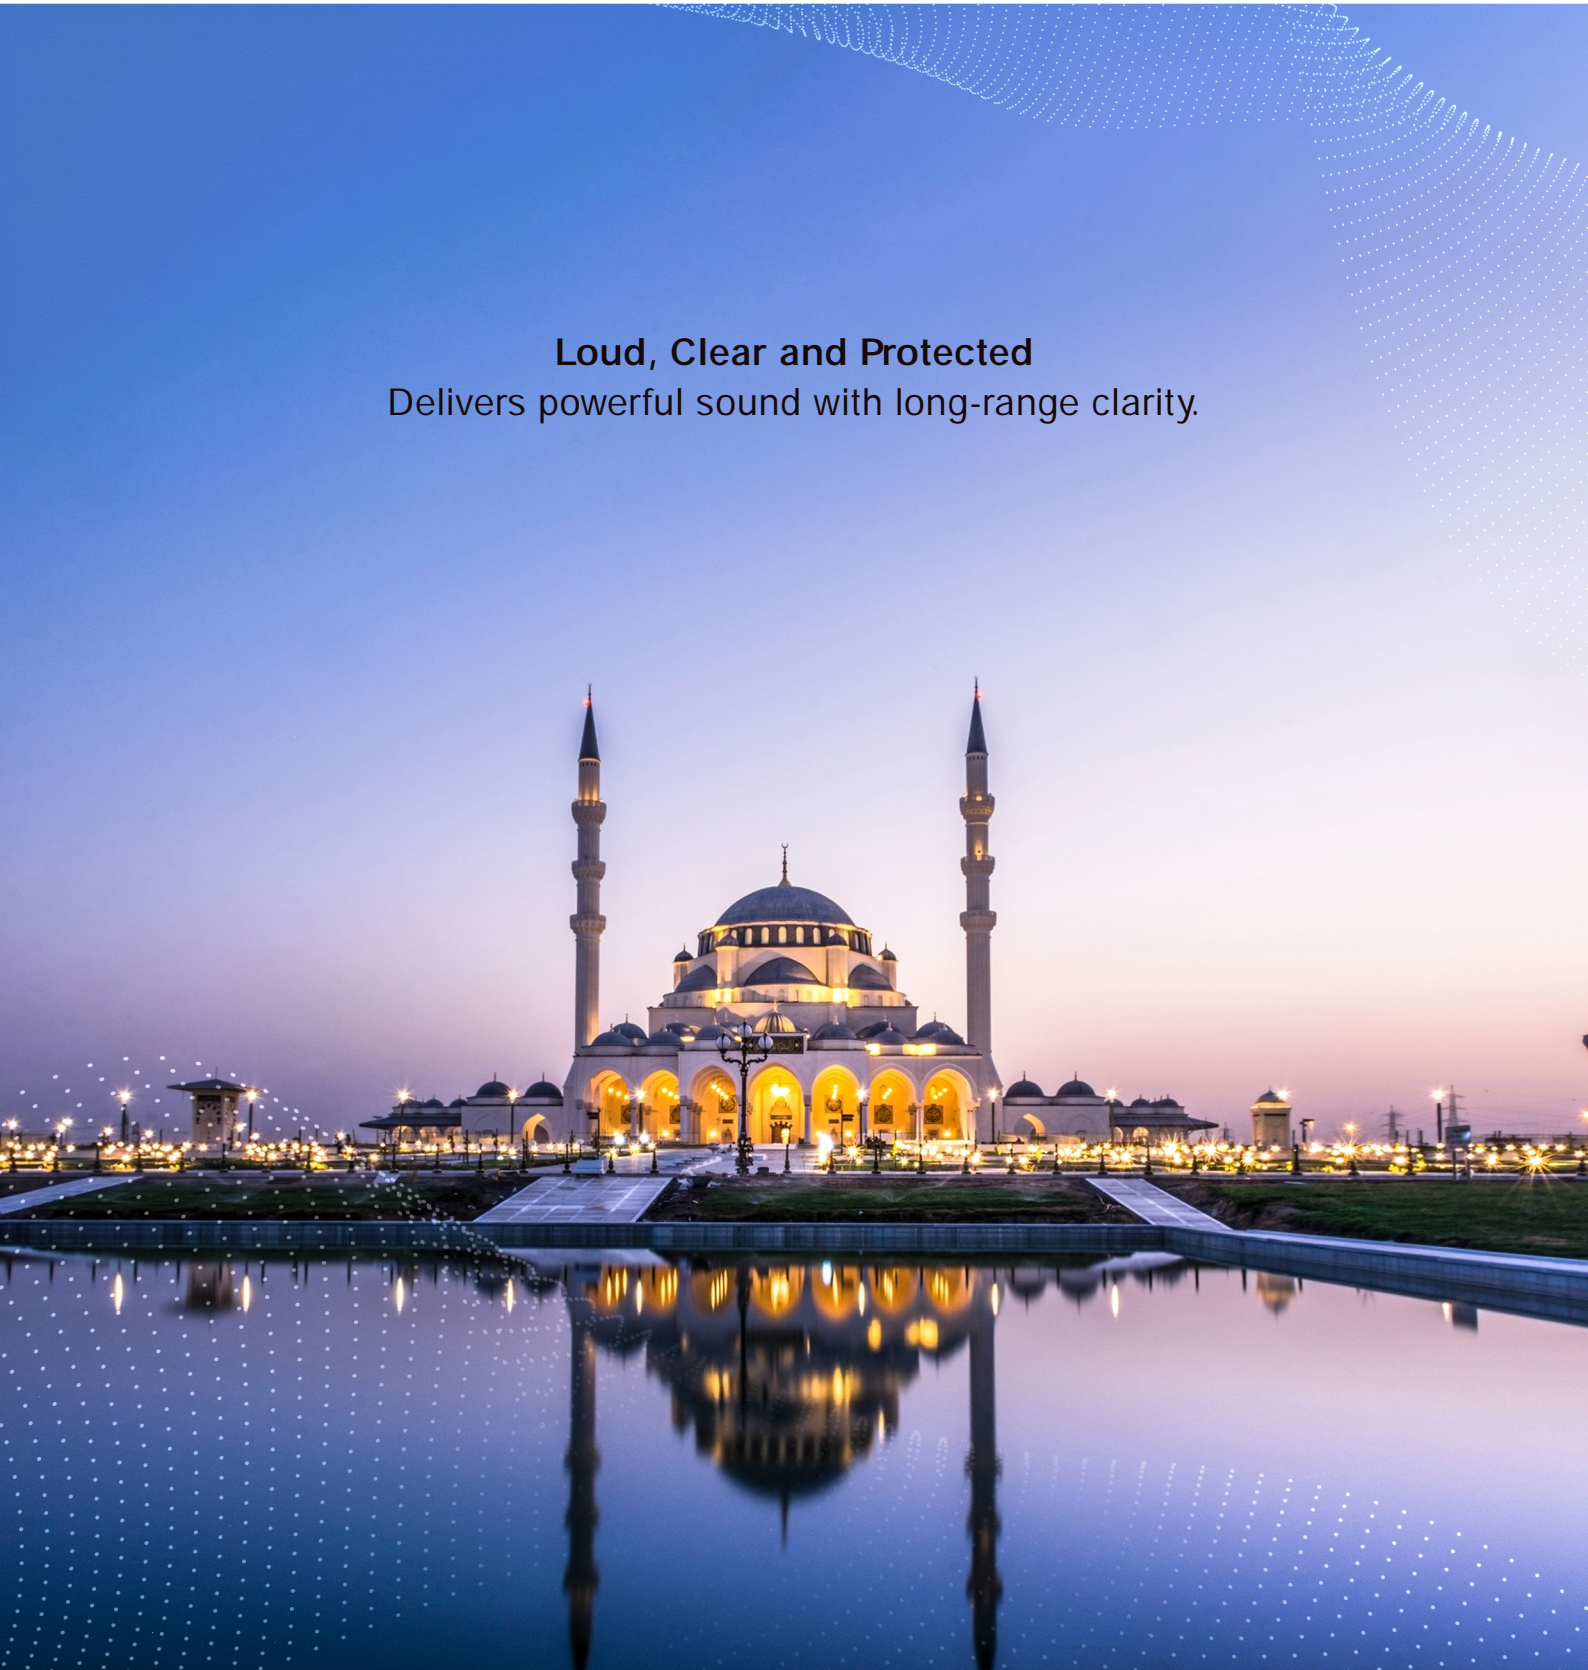




## Features

- Z-DH502-AS features a long horn which permits sounds to easily pass through and is ideal for providing public address information.
- Z-DH502-AS is designed to be used in conjunction with 2 driver units.
- Z-DH502-AS has an internal bird protector net to prevent insects and birds from getting into the unit



Application : Mosques, Factory, Airport, School Field, Early Warning System

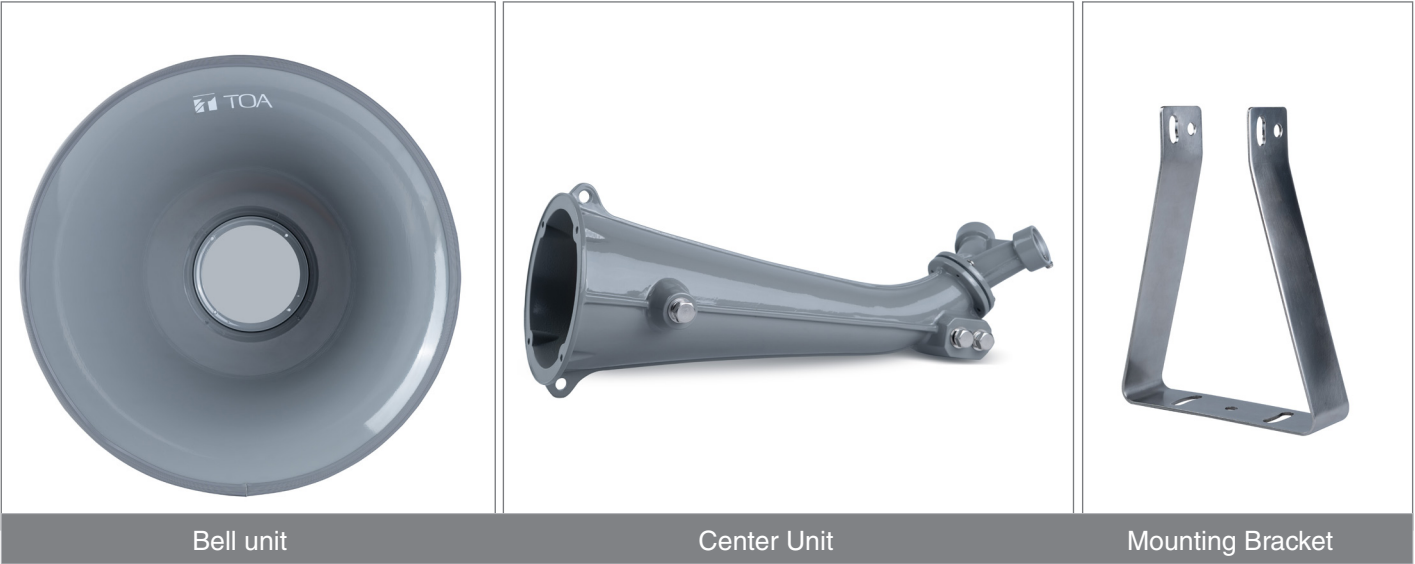


Specifications

Z-DH502-AS

Specification	Z-DH502-AS
Applicable Drivers	ZH-662D (MD)
Sound Pressure Level	110 dB (1 W, 1 m) (when operated with drivers)
Frequency Response	200 Hz – 8 kHz (when the ZH-662D (MD) unit is used)
Driver Coupling Adapter	1 – 3/8 18 threads (inch screw)
Variable Installation Angle	Hor. : +15°, -15° ; Ver. : +15°, -15° (when locally procured mounting bracket is used)
IP rating	IP65 for Drivers (When be installed to Horn) *
Finish	Bell, Horn B and Adapter Y-Shaped : Aluminum, Grey, Powder coating Mounting Braket : Stainless Steel, Natural
Dimensions	Ø500 X 846 (D) mm (Ø19.69" X 33.31")
Weight	5.7 kg (12.57 lb)
Accessories	BH Screw M5x15 SUS 3-SEM ...4 pcs, Rubber Gasket ...1 pcs

\*Tentative value

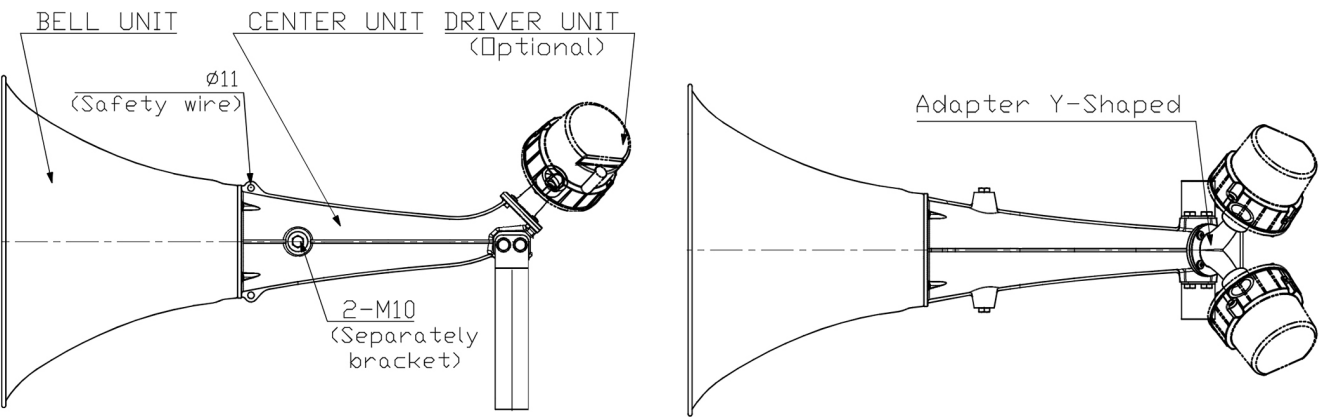

## ZH-662D/MD-AS(Driver Unit)



Specification	ZH-662D-AS	ZH-662MD-AS (with transformer)
Rated Input	60W	
Rated impedance	16Ω	100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W)
Output Sound Pressure Level	110dB (1W,1m) (When operated with JIS C 5504 standard horn)	
Frequency Response	150 - 8000Hz (When operated with JIS C 5504 standard horn)	
IP Code	IP 65 (When a driver is operated with a horn)	
Horn Coupling	1 - 3/8" -18 threads (inch screw)	
Polarity	Hot: Black ; Com: White	
Operating Temperature	-20°C to +55°C (-4°F to +131°F) must be free from dew condensation	
Finish	Upper Cover: Aluminum, white, powder coating Unit case : HIPS, white Screw : Stainless Steel Speaker Cable : Polyvinyl chloride insulated cabtyre cable 6mm (0.24") in diameter, 450mm (17.72") in length, white	
Dimensions	Ø139 X 108 (D) mm (Ø5.47" X 4.25")	Ø139 X 151 (D) mm (Ø5.47" X 5.94")
Weight	2kg (4.41lb)	2.7kg (5.95lb)



Scan for more info



Specifications are subject to change without notice.