


DESCRIPTION

The VX-3200PS is a DC power supply used for VX-3000 systems. It is a 1U rack-mount unit designed for efficient use of rack space, energy savings, and lightweight installation. The total number of connected amplifier/devices must be 2000W or less.


SPECIFICATIONS

Power Source	220-240 V AC, 50/60 Hz
Power Consumption	2500 W max in total (at rated output) 435 W max in total (EN62368-1)
DC Power Output	Rated output: 2400 W (total DC power output) 4 x 31 V 25 A max. each, M4 screw terminal, distance between barriers: 13 mm (0.51") 1 x 31 V 2 A max., removable terminal block (2 pins)
Connect Device/Amplifier	VX-015DA, VX-030DA, VX-050DA * Max. 4 units (VX-050DA) or less than 2000W
Fault Output	No-voltage make contact, electrical contact output (NO), control current: 10 mA, withstand voltage: 28 V DC, removable terminal block (2 pins)
Panel Indicator	Power (Green), DC Fault (Yellow)
Operating Temperature	0°C to +40°C (32 °F to 104 °F)
Operating Humidity	Under 90% RH (no condensation)
Finish	Panel: Surface-treated steel plate, black, paint
Dimensions	482 (W) x 44 (H) x 345 (D) mm (19" x 1.7" x 13.6")
Weight	7.51 kg (16.56 lbs)
Accessory	Power cord (1.8 m) ∅2, Removable terminal plug (2 pins) ∅2


APPEARANCE



Rear View

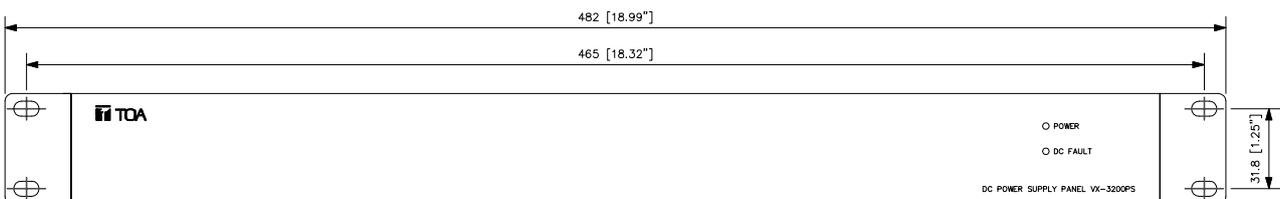

Front View

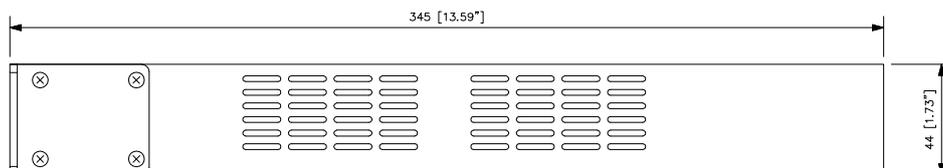

Side View

UNIT:mm SCALE:1/3