

PAGING HORN SPEAKER


DESCRIPTION

The ZH-615SM is designed to be used exclusively in the paging or intercom system. Its impedance can be easily changed with a standard screwdriver. To avoid the unit's, do not sound a signal tone from this speaker for long periods of time.


SPECIFICATIONS

Model		ZH-615SM
Input		Rated 15W
Line Voltage		100V
Impedance		670Ω (15W), 1kΩ(10W), 2kΩ(5W), 3.3kΩ(3W)
Sound Pressure Level		≥ 109dB (1W, 1M) (at 500 ~ 2.5kHz peak level)
Frequency response		Low : ≤ 333 High : ≥ 10,511
Sensitivity as microphone		-20dBm at 1kHz
(0dBm = 1mW / 10dyne / cm2)		
Ambient Temperature		-20°C to +55°C
Finish		
1 H	ORN-A	Aluminium (off white)
2,5 H	ORN-BC, REAR COVER	Weather proof as ABS resin (off white)
3 B	RACKET HOLDER	Aluminium die cast (off white)
4 BI	RACKET	Steel (dark grey)
Weight		1.3kg

APPEARANCE

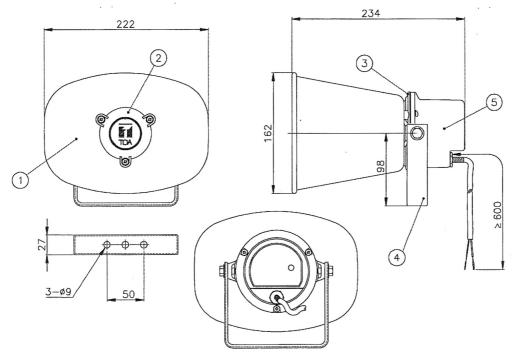

Connection diagram



UNIT: MM