

PAGING HORN SPEAKER


DESCRIPTION

The ZH-610SM is designed to be used exclusively in the paging or intercom system. Its impedance can be easily changed with a standard screwdriver. To avoid the unit's, do not sound a signal tone from this speaker for long periods of time.


SPECIFICATIONS

Model			ZH-610SM
Input			Rated 10W
Line Voltage			100V
Impedance			1kΩ (10W), 2kΩ(5W), 3.3kΩ(3W), 10kΩ(1W)
Sound Pressure Level			≥ 107dB (1W, 1M) (at 500 ~ 2.5kHz peak level)
Frequency response			Low : ≤ 375 High : ≥ 10,511
Sensitivity as microphone			-24dBm at 1kHz
(0dBm = 1mW / 10dyne / cm2)			
Ambient Temperature			-20°C to +55°C
Finish			
	1	HORN-A	Aluminium (off white)
	2,5	HORN-BC, REAR COVER	Weather proof as ABS resin (off white)
	3	BRACKET HOLDER	Aluminium die cast (off white)
		BRACKET	Steel (dark grey)
Weight			1.2kg

APPEARANCE

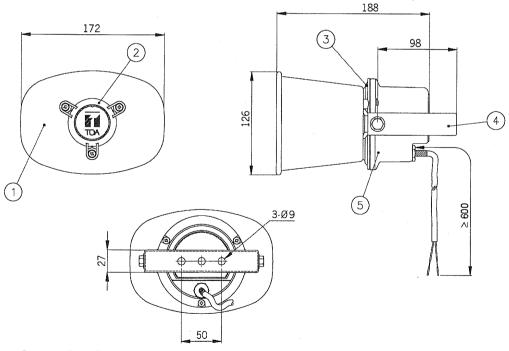

Connection diagram



UNIT: MM