



ZS-HS SERIES COAXIAL ARRAY SPEAKERS


TOA ZS-HS mengoptimalkan Coaxial Tweeter Array yang menghasilkan suara yang detil & jelas

TOA ZS-HS memenuhi kebutuhan sound system sebagai speaker utama dan speaker floor monitor

TOA ZS-HS memiliki pengaturan narrow directivity (90° horisontal x 40° vertikal)

TOA ZS-HS tersedia dalam model Low Impedance dan High Impedance

TOA ZS-HS sangat istimewa dalam fitur dengan harga yang sangat kompetitif

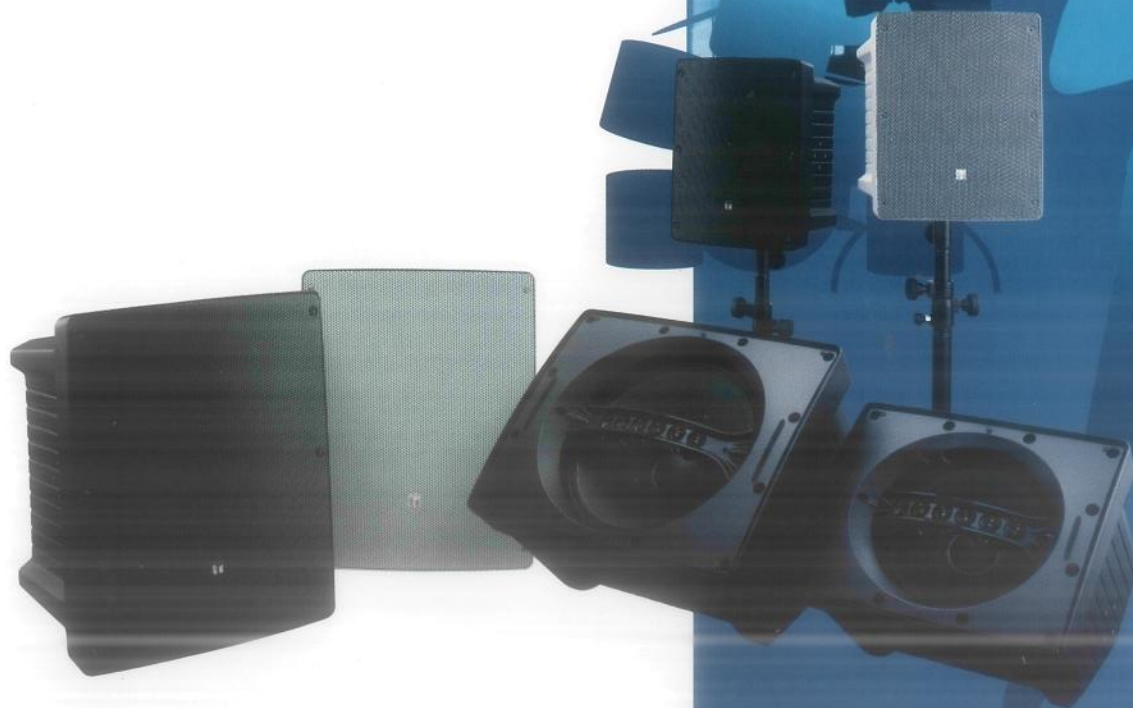

■ SPESIFIKASI

SPESIFIKASI

					
Model		ZS-HS120B	ZS-HS120W	ZS-HS150B	ZS-HS150W
Enclosure		Sealed type			
Power Handling Capacity		Continuous pink noise : 100 W Continuous program : 300 W			
Rated Impedance		8 Ω			
Frequency Response		80 ~ 20.000 Hz		70 ~ 20.000 Hz	
Sensitivity		97 dB (1W, 1m)		98 dB (1W, 1m)	
Crossover Frequency		3 kHz			
Directivity Angle		Horizontal: 90°, Vertical: 40°			
Speaker Component	Low Frequency	30 cm (12") cone type		38 cm (15") cone type	
	High Frequency	Balanced dome tweeter x 6			
Input Terminal		NEUTRIK NL4MP Speakon dan M4 screw terminal (Barrier spacing : 9 mm)			
Finish	Enclosure	Polypropylene Black	Polypropylene White	Polypropylene Black	Polypropylene White
	Punched net	Surface-treated Steel plate, Black	Surface-treated Steel plate, White	Surface-treated Steel plate, Black	Surface-treated Steel plate, White
Accessories		Handle x1; Handle Fitt.Bracket, Mount.Screw x2; Rubber Foot, Mount.Screw x2			
Dimension		361 (w) x 448 (h) x 320 (d) mm		451 (w) x 560 (h) x 400 (d) mm	
Weight		8,5 kg		12 kg	

Model		ZS-HS1200BT	ZS-HS1200WT	ZS-HS1500BT	ZS-HS1500WT
Enclosure		Sealed type			
Rated Input		60W (High Impedance)			
Power Handling Capacity		Continuous pink noise : 100 W Continuous program : 300 W			
Rated Impedance		8 Ω ; 100V Line : 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W)			
Sensitivity		97 dB (1W, 1m)		98 dB (1W, 1m)	
Frequency Response		70 ~ 20.000 Hz		60 ~ 20.000 Hz	
Crossover Frequency		3 kHz			
Directivity Angle		Horizontal: 90°, Vertical: 40°			
Speaker Component	Low Frequency	30 cm (12") cone type		38 cm (15") cone type	
	High Frequency	Balanced dome tweeter x 6			
Input Terminal		NEUTRIK NL4MP Speakon dan M4 screw terminal (Barrier spacing : 9 mm)			
Finish	Enclosure	Polypropylene Black	Polypropylene White	Polypropylene Black	Polypropylene White
	Punched net	Surface-treated Steel plate, Black	Surface-treated Steel plate, White	Surface-treated Steel plate, Black	Surface-treated Steel plate, White
Accessories		Handle x1; Handle Fitt.Bracket, Mount.Screw x2; Rubber Foot, Mount.Screw x2			
Dimension		361 (w) x 448 (h) x 320 (d) mm		451 (w) x 560 (h) x 400 (d) mm	
Weight		10 kg		14 kg	



Catatan : Untuk pengembangan produk, desain dan spesifikasi dapat berubah tanpa pemberitahuan.



Human Society with
Sound & Communication

TOA Corporation