

DESCRIPTION

Mixer pre-amplifier is a wireless mixer having 9 input channels including 4 channels input MIC with phantom, 1 selectable input with options MIC or AUX, 3 selectable input with options MIC or LINE and 1 selectable with options MIC or streaming from smartphone. Has remote function by smartphone for settings purpose. Parameter settings are Volume, Bass, Middle, Treble, Muting and Input Selector.


SPECIFICATIONS

* 0dB = 1 V


Power Source	AC 220-240 V, 14 W
Audio Input	Input CH 1 with Phantom option 19 V DC : -CHIME MIC : Balanced, Selectable sensitivity -55 dB (1.8 mV)/-30 dB (30 mV), 2.2 K Ω , rated 1 KHz, RJ45 connector -MIC : Balanced, Selectable sensitivity -55 dB (1.8 mV)/-30 dB (30 mV), 2.2 K Ω , rated 1 KHz, Phone jack connector Input CH 2-4 with Phantom option 19 V DC : -Balanced, Sensitivity -55 dB (1.8 mV), 2.2 K Ω , rated 1 KHz, Phone jack connector Selectable Input CH 5 with options : -MIC : Balanced, Sensitivity -55 dB (1.8 mV), 2.2 K Ω , rated 1 KHz, Phone jack connector -AUX : Unbalanced, Sensitivity 0 dB, 10 K Ω , rated 1 KHz, RCA jack connector Selectable Sensitivity Input CH 6-8, Removable terminal 3 pins with sensitivity options : -LINE : Balanced, Sensitivity 0dB, 2.2 K Ω , rated 1 KHz -MIC : Balanced, Sensitivity -55 dB (1.8 mV), 2.2 K Ω , rated 1 KHz Selectable Sensitivity Input CH 9, Removable terminal 3 pins with sensitivity options : -MIC : Balanced, Sensitivity -55 dB (1.8 mV), 2.2 K Ω , rated 1 KHz -STREAMING : Unbalanced, Sensitivity 0 dB 10 K Ω , rated 1 KHz
Audio Output	Audio OUT A & B, Balanced, Removable terminal 3 pins Optional output level : 0 dB/-10 dB (300 mV)/-20 dB (100 mV), 600 Ω , rated 1 KHz
Control Output	9 Shortcut switch IN, 2 Shortcut switch OUT, 1 Shortcut switch VOLUME, 1 Shortcut switch Tone Control, 1 Shortcut switch Input Selection, 1 Navigation switch (Right, Left, Push)
Tone Control	Bass $\pm$ 13 dB at 100 Hz, Middle $\pm$ 13 dB at 1 KHz, Treble $\pm$ 13 dB at 10 KHz
Distortion	Under 1% at 1 KHz, rated power
Frequency Response	30 Hz - 20 KHz, $\pm$ 3 dB
Indicator	LCD display with backlight green, POWER indicator light green, STATUS indicator light green, SIGNAL indicator light green, PEAK indicator light red
Connection	Bluetooth 4.2, USB Type B (PC Setting/Update Firmware)
Operation Temperature	0°C to +40°C
Operation Humidity	Under 90% RH (no condensation)
Finish	Front Panel : Aluminum Hair Line, Painting Black Case : Steel Plate, Painting Black
Dimensions	420 (W) x 59 (H) x 339.7 (D) in mm (16.53" x 2.32" x 13.37")
Weight	3.3 kg
Accessories	6P Connector ...2 3P Connector ...2

■ APPEARANCE

Rear View

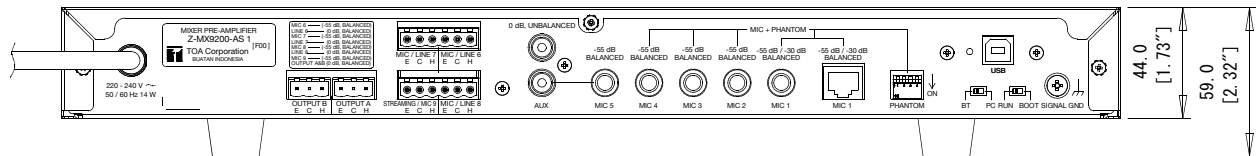

Front View

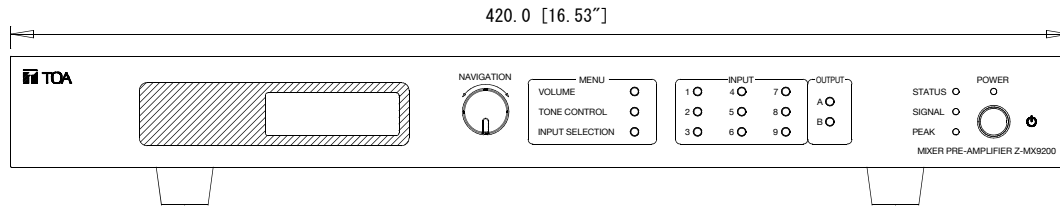

Side View

