

DESCRIPTION

The RM-200M Remote Microphone connects to the VM-3240VA, VM-3360VA, VM-2120 and VM-2240 for the purpose of making emergency(*3)/general broadcast announcements.

SPECIFICATIONS

(*1) 0 dB = 1 V


Power Source	24 V DC (Operating range: 14 – 28 V DC) Power input jack: Non-polarity type Usable power input plug(*2): Outer diameter $\phi 5.5$ mm, inner diameter $\phi 2.1$ mm, length 9.5 mm
Current Consumption	100 mA or less
Audio Output	0 dB(*1), 600 Ω , balanced
Distortion	1% or less
Frequency Response	100 – 20,000 Hz
S/N Ratio	60 dB or more
Microphone	Unidirectional electret condenser microphone
No. of Function Keys	13, Emergency key (covered), Talk key
Emergency Broadcast(*3)	Activation of Emergency Broadcast (pre-recorded announcement or live microphone announcement) by Emergency Broadcast Switch
Volume Control	Microphone volume control
Connection Cable and Connector	Category 5 STP cable, RJ45 connector
Finish	ABS resin, blueish gray (PANTONE 538 or its equivalent)
Dimensions	190 (W) $\times$ 76.5 (H) $\times$ 215 (D) mm (Gooseneck microphone excluded)
Weight	750 g
Accessory	Link cable (3 m)1
Option	Wall mounting bracket: WB-RM200

(*2) Use the AC adapter AD-246 or equivalent.


(*3) Connecting VM-2000 only

APPEARANCE


Rear View

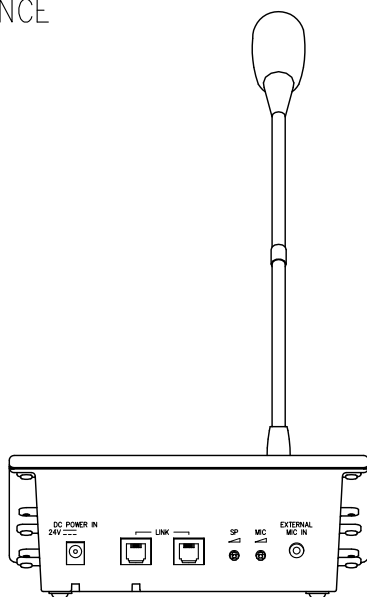

Top View

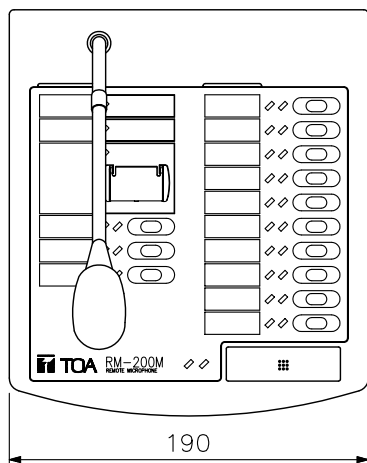

Side View

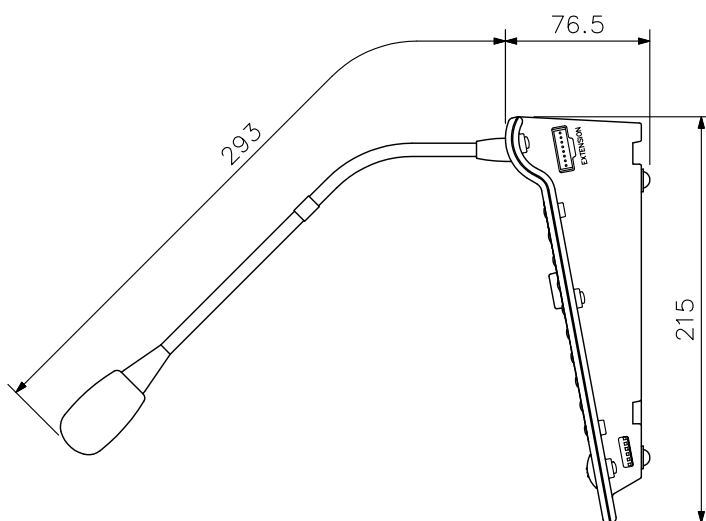

UNIT:mm SCALE:1/4