

PORTABLE AMPLIFIER

ZW-S110SD-AS

DESCRIPTION

TOA's ZW—S110SD—AS is a portable amplifier that has an elegant design and durable. It offers reliable performance, clear, powerful sound and is simple to operate. Wheels are fitted for moving it around effortlessly.


SPECIFICATIONS

Speaker	6 ohm/1"tweeter, 4 ohm/10"woofer
Receiver Module	UHF PLL Non-diversity receiver module (2 pc receivers) with 16 user selectable
	channels (UHF 655-681MHz)
Output power	70W(RMS)/100W (MAX) (Class-D Amplifier)
Frequency Response	70Hz~15KHz (± 3dB)
Function	CD Player; USB (support up to 32GB); SD/MMC Card (support up to 32GB);
	Mic Input x 2 (phone jack x 1, combination XLR & phone jack x 1);
	Line Input (RCA x 1 or phone jack x 1); Mixed out x 1 (Phone jack);
	External speaker out x 1 (Phone jack); Tuner Unit x 2 (WTU-Z100)
Charging time	12V/5Ah (2pcs) Lead Acid battery : 6-8 hours
	1.2V/1.3Ah Nickel-Metal Hybride battery : 5 hours (for microphone)
Operating time	Averagely 3—9 hours (depending on volume)
Power supply	100-240V (90-264V) switching power supply
Rechargeable battery	12V/5Ah Lead Acid battery : 2 pcs
	1.2V/1.3Ah Nickel-Metal Hybride battery : 4 pcs (for microphone)
Frame material	Panel : Plastic with painting Black, Grille : Metal with painting black
Dimensions	560 (H) x 330 (W) x 310 (D) mm
Weight	16.5 kg (without Microphone)
Accessories	Remote control x 1, AC power cord x 1 (Type C), Hex head wrench x 1,
	Blank cover x 2, Handheld microphone x 1, Lavaliere microphone x 1
Options	Speaker stand : ST-34B

Notes:

- o Specifications are measured on 220V AC.
- o the design and specifications are subject to change without notice for improvement.

APPEARANCE

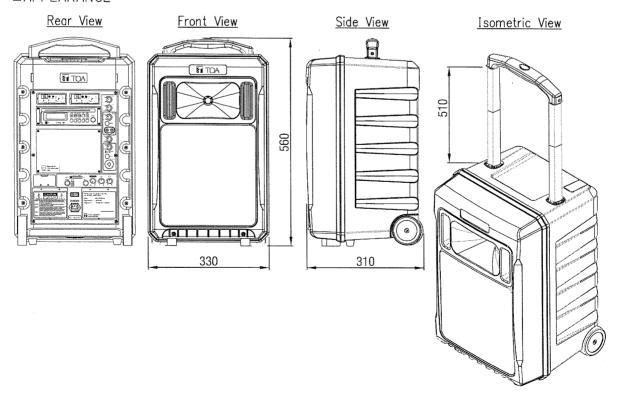

UNIT: mm SCALE: 1/7

Page 1/2




PORTABLE AMPLIFIER


ZW-S110SD-AS

APPEARANCE


Remote Control



Handheld Microphone



Lavaliere Microphone

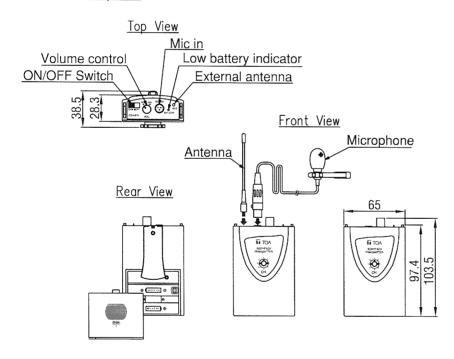

UNIT: mm SCALE: 1/4

Page 2/2